

10 Rec 15 OCT 2004

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number  
WO 03/086581 A1

- (51) International Patent Classification<sup>7</sup>: B01D 46/02, 29/15
- (21) International Application Number: PCT/DK03/00254
- (22) International Filing Date: 14 April 2003 (14.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
BA200200106 15 April 2002 (15.04.2002) DK
- (71) Applicant (for all designated States except US): SI-MATEK A/S [DK/DK]; Stationsvej 3, DK-4490 Jerslev Sj. (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): JENSEN, Arne [DK/DK]; Bakkendrupvej 38, DK-4480 St. Fuglede (DK). CHRISTENSEN, Keld [DK/DK]; Hybenvej 19, DK-4291 Ruds Vedby (DK).
- (74) Agent: ZACCO DENMARK A/S; Hans Bekkevolds Alle 7, DK-2900 Hellerup (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A FILTER BAG AND A FILTER DEVICE PROVIDED WITH SUCH FILTER BAG

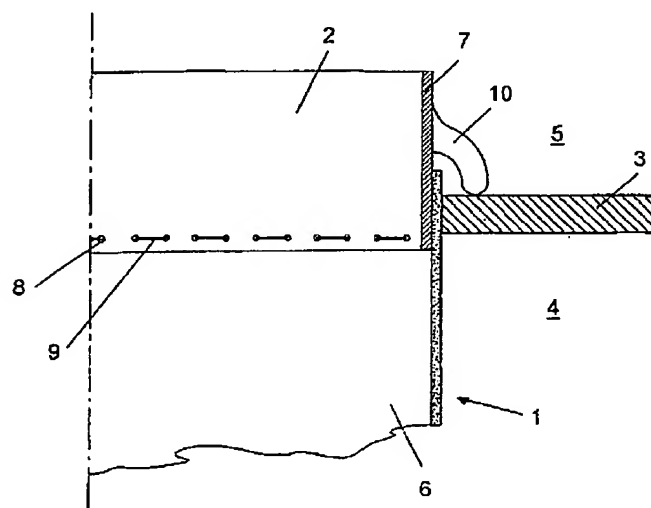

(57) Abstract: A filter bag (1) for a filter device, which filter bag comprises a tubular, flexible, air-penetrable filter body (6) provided with a suspension arrangement at an unfolded end thereof. The suspension arrangement comprises a rigid ring element (7) annularly secured to the unfolded end of the filter body. The ring element (7) is arranged at least partially at an interior part of the filter body (6). Also a filter device comprising a housing with a dust chamber (4) and a clean-air chamber (5) that are separated by an partition wall (3) suspending at least one filter bag (1) as described above that extends through an opening (2) provided in the partition wall (3) with a main part of the filter body (6) located in the dust chamber (4). The ring element (7) of the filter bag (1) extends at least partially into the opening (2) in the partition wall (3).

WO 03/086581 A1